
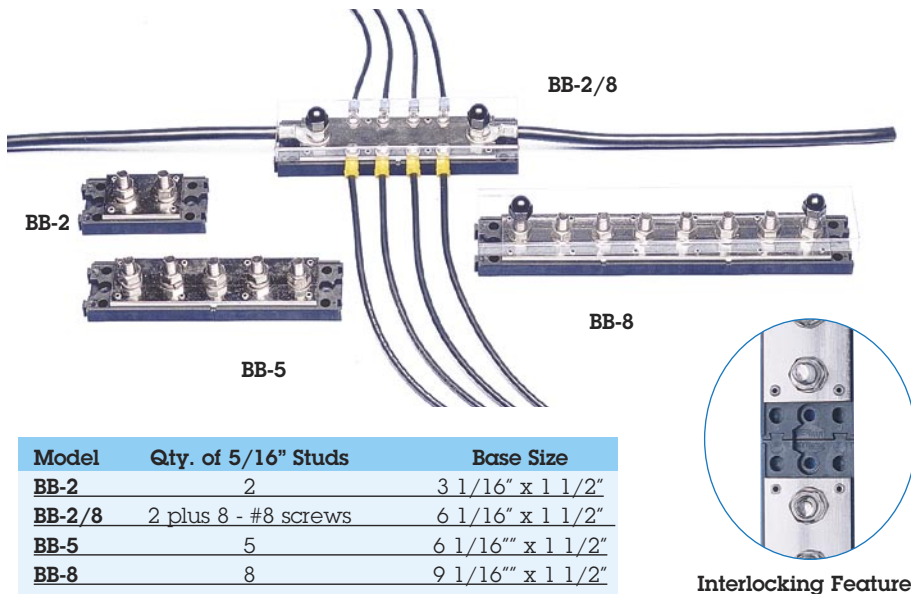


Terminal Strips & Bus Bars

Terminal Strips

- Use as a common negative/neutral bus for AC or DC systems. Dual terminal strips in 4 or 8 screw positions on 3/4" centers are secured to a high density insulated base. All hardware, bus material and fasteners are nickel-plated brass.
- #8 screws accommodate various size ring terminals and each terminal strip is rated for 100 amps.
- Interlocking bases allow use of multiple terminal strips and bus bars (described below) to produce secure and neat wiring assemblies. The terminal strip bases have provisions for either #8 or #10 mounting screws, and no conductive parts in the base are exposed to the mounting surface.
- A clear plastic insulating cover is provided with skin packed units. Specify bulk or skin pack when ordering.

Model	Total # of Base Terminals	Size
TS-2x4	8	3 1/16" x 1 1/2"
TS-2x8	16	6 1/16" x 1 1/2"

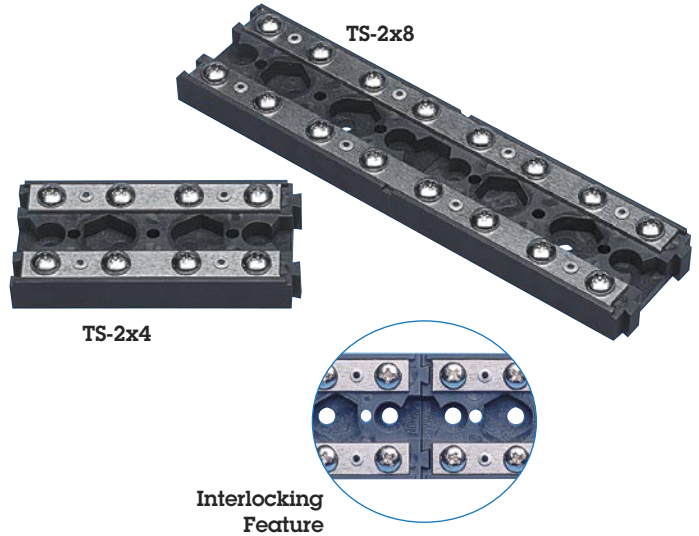


Model	Qty. of 5/16" Studs	Base Size
BB-2	2	3 1/16" x 1 1/2"
BB-2/8	2 plus 8 - #8 screws	6 1/16" x 1 1/2"
BB-5	5	6 1/16" x 1 1/2"
BB-8	8	9 1/16" x 1 1/2"

Bus Bars

- Ideal as a DC ground tie point or positive bus, these heavy duty, 500 amp rated bus bar assemblies feature 5/16" studs on 1" centers in 1/4" thick copper bar for common connection/distribution of large wire gauges and accommodate 5/16" ring terminals.
- One combination model features two 5/16" studs and eight #8 screws, accommodating multiple size wire terminals.
- All bus material is nickel-plated copper.
- A clear insulating protective cover is provided to prevent short circuits and provide visibility of lugs.
- The mounting bases are keyed for interlocking and may be mated with the terminal strips (described above). Conductive parts are captured and recessed away from the mounting surface. Use #8 or #10 screws for mounting.

Connector Strips

- Molded nylon encases 6 or 12 pairs of connectors that use screw compression to secure wires without use of lugs. Ideal for electronic installations. Brass barrels capture wires and are held in place with a stainless steel "finger" compressed by a screw. The screw does not make contact with the wires, protecting the copper strands from cuts and breakage - Meets ABYC standards. (Same connector strip used in BX Series boxes - see page 26.)
- 3 Sizes: ranging from 6 to 16 gauge
- Strips are easily cut to meet wiring requirements and space limitations.
- All models clamshell packed for attractive retail display, or bulk packed for contractor use.

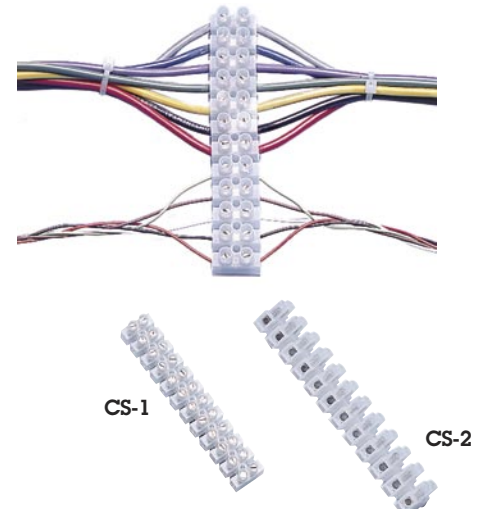

Model	# of Terminal Pairs	Max Wire Gauge	Max Amps*	Size L X W X H
CS-1	12	16	6	3.75" x .675" x .5"
CS-2	12	14	10	4.5" x .75" x .75"
CS-3	12	12	16	5.5" x .875" x .8"

*Per set of terminals



DC Power Onboard